


PRODUCT FEATURES

CONSTRUCTION

- 12.7 mm WBP-GRADE LAMINATED BIRCH PLYWOOD FLOORING WITH A HEAVY-WEARING, ANTI-SLIP HPL SURFACE, DESIGNED FOR DURABILITY IN COMMERCIAL USE
- HJ-12 ALUMINIUM PANEL JOINER EXTRUSION (2 mm THICK) USED TO SECURELY JOIN FLOOR PANELS AND MAINTAIN A NEAT, SEALED FINISH
- 2 mm ALUMINIUM EDGE EXTRUSION TO PROTECT EXPOSED EDGES AND HIGH-TRAFFIC FLOOR AREAS
- ALUMINIUM REAR STEP EXTRUSION TO PROTECT THE REAR LOADING EDGE OF THE FLOOR FROM IMPACT AND WEAR
- PRE-DRILLED 14 mm HOLES FOR TIE-DOWNS ENABLE REFITTING AFTER FLOORING INSTALLATION, ENSURING A CLEAN, SMOOTH FINISH WITHOUT LARGE CUT-OUTS.
- 65 DIAMETER HOLE CUTOUT FOR THE SPIRE WHEEL ACCESS.
- SEPARATE PANEL FOR THE MAINTENANCE HATCH (REMOVABLE IF REQUIRED).

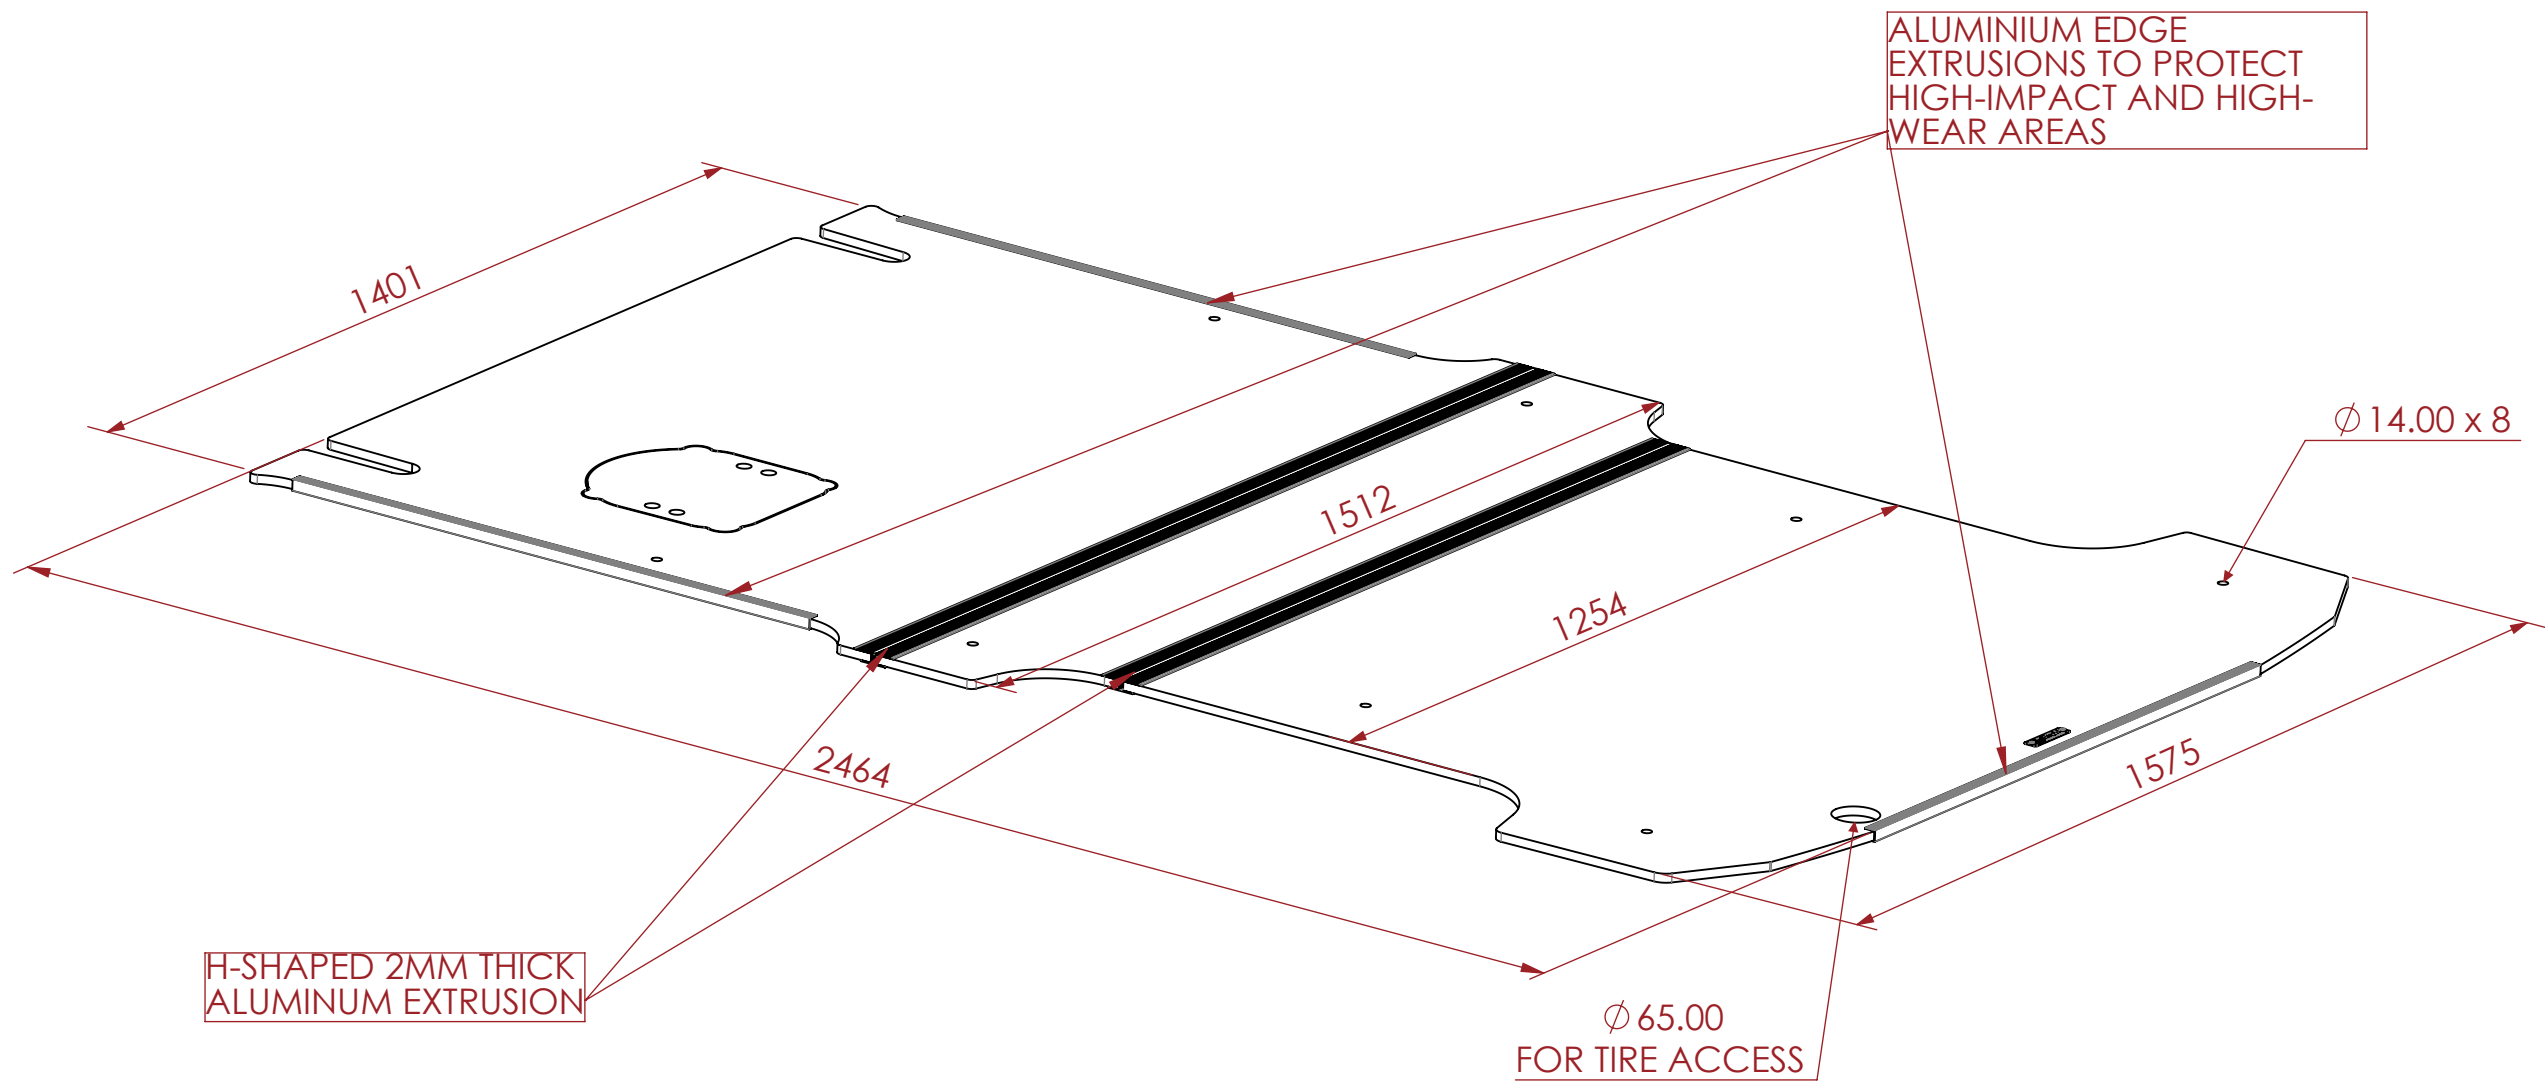

ESTIMATED WEIGHT :

30.55 KG

ITEM CODE:

HYU-TQ-LWB-5-VF

DRAWN BY:

KA

CHECKED BY:

AS

SCALE:

NTS



by **ARMOR**

MAIL : sales@vanlining.com.au
WEB : www.vanlining.com.au