


PRODUCT FEATURES

CONSTRUCTION

- 12.7 mm WBP-grade Laminated Birch Plywood Flooring with a heavy-wearing, Anti-slip HPL surface, designed for durability in commercial use
- HJ-12 aluminium panel joiner extrusion (2 mm thick) used to securely join floor panels and maintain a neat, sealed finish
- 2 mm aluminium edge extrusion to protect exposed edges and high-traffic floor areas
- Aluminium rear step extrusion to protect the rear loading edge of the floor from impact and wear
- Pre-drilled 14 mm holes for TIE-DOWNS enable refitting after flooring installation, ensuring a clean, smooth finish without large cut-outs.

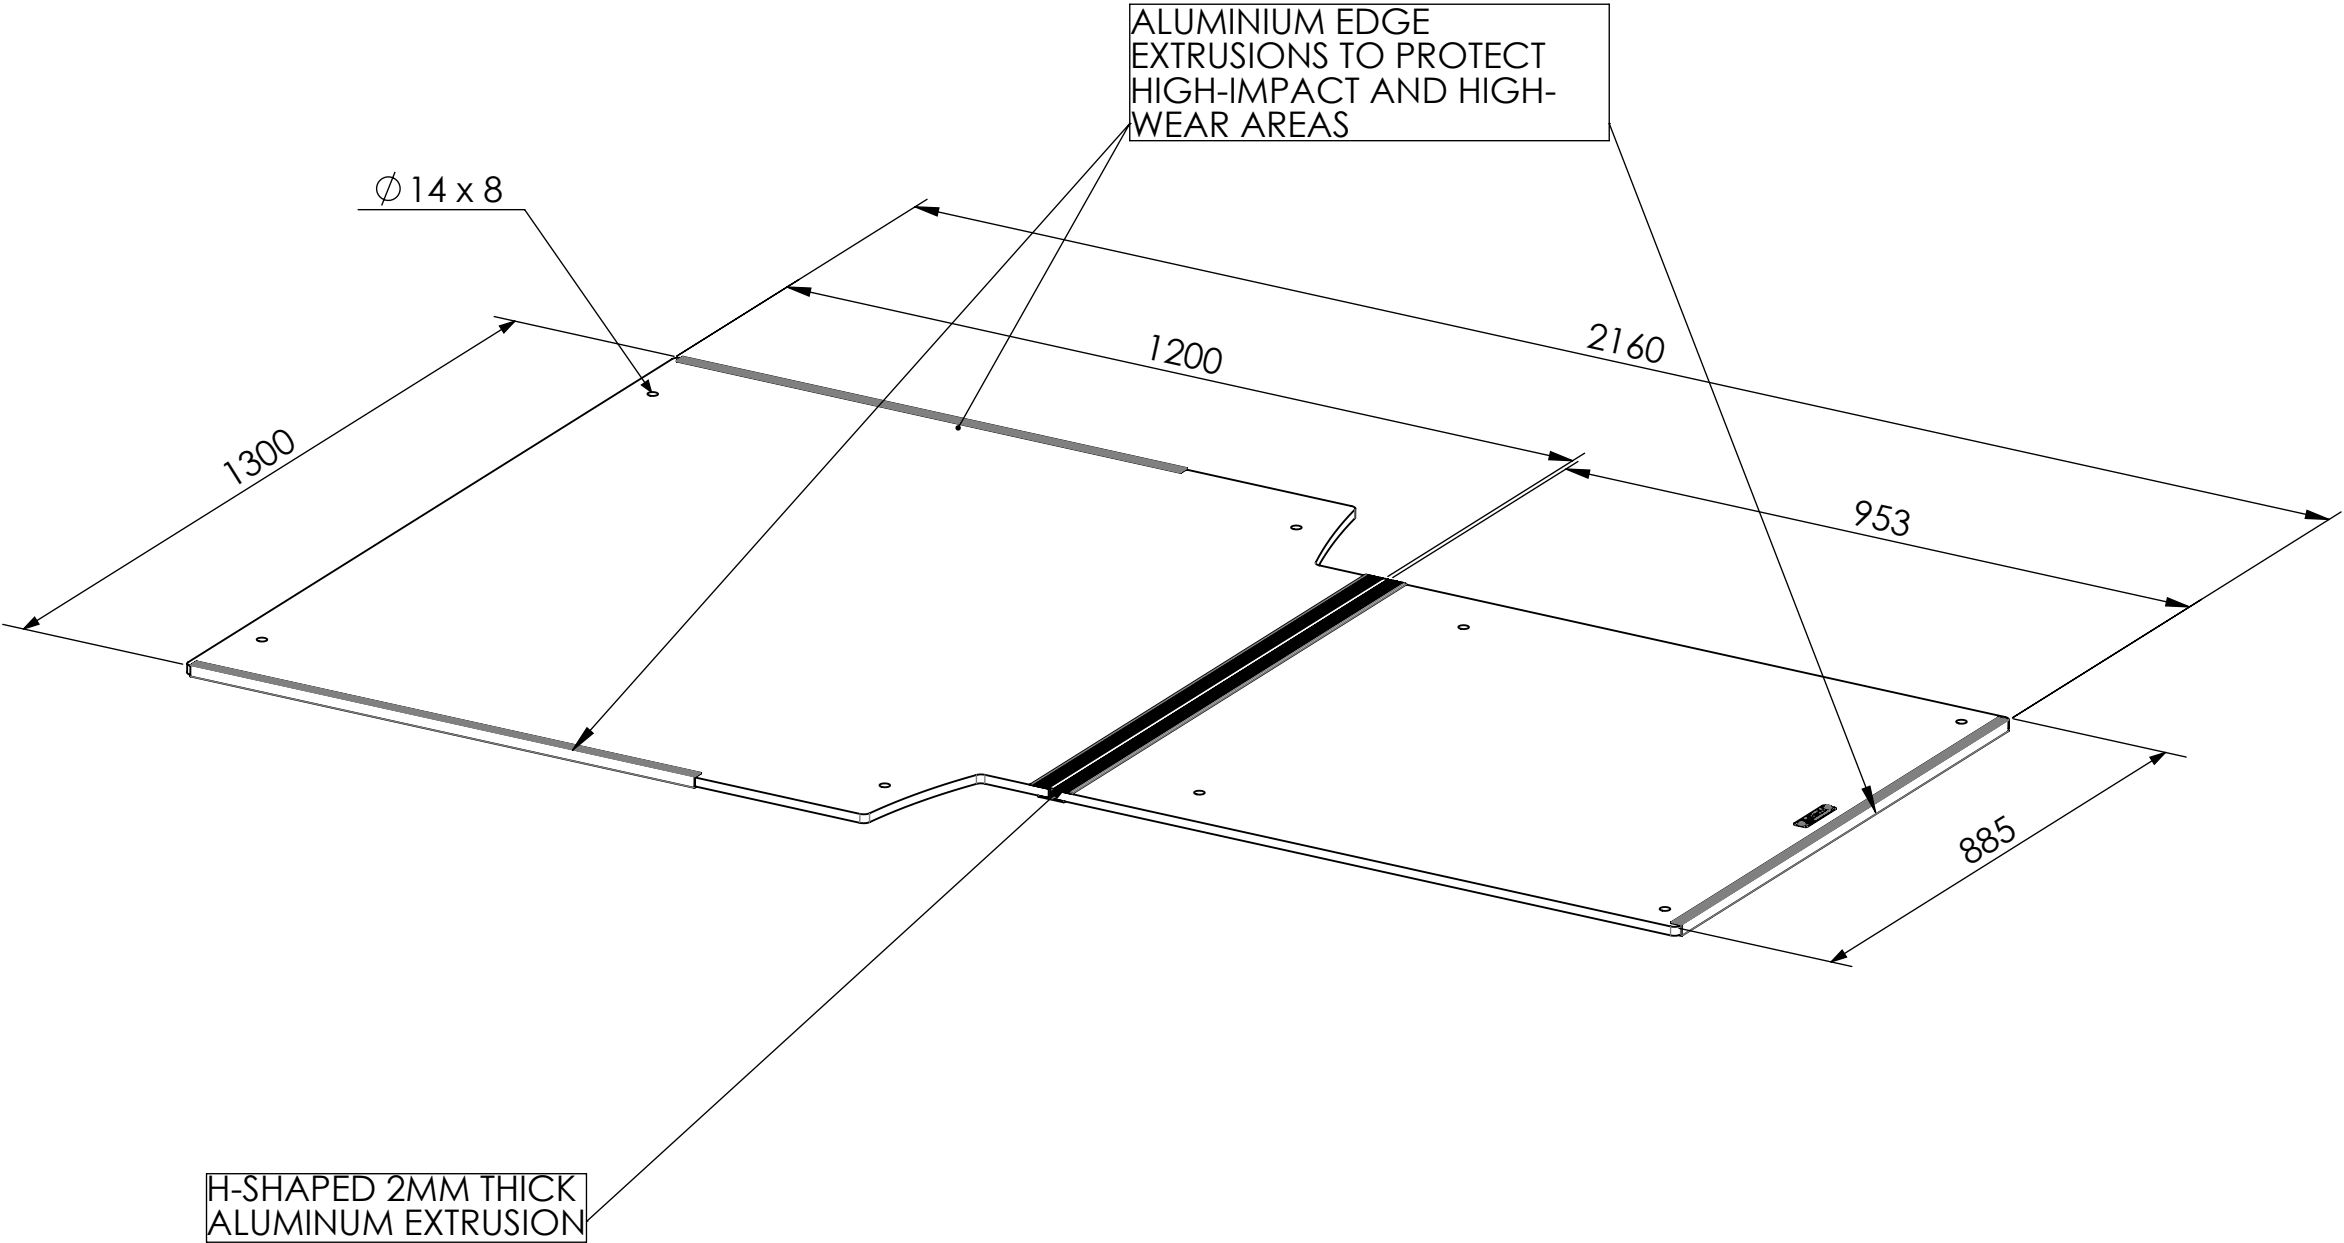


ESTIMATED WEIGHT :  
20.92 KG

ITEM CODE:  
KIA-PV5-LWB-6-VF

DRAWN BY: KA  
CHECKED BY: AS

SCALE:  
NTS



by **ARMOR**

MAIL : sales@vanlining.com.au  
WEB : www.vanlining.com.au