
PRODUCT FEATURES

CONSTRUCTION

- 12.7 mm WBP-grade Laminated Birch Plywood Flooring with a heavy-wearing, Anti-slip HPL surface, designed for durability in commercial use
- T - aluminium panel joiner extrusion (2.5 mm thick) used to securely join floor panels and maintain a neat, sealed finish
- 2 mm aluminium edge extrusion to protect exposed edges and high-traffic floor areas
- Aluminium rear step extrusion to protect the rear loading edge of the floor from impact and wear
- Pre-drilled 14 mm holes for TIE-DOWNS enable refitting after flooring installation, ensuring a clean, smooth finish without large cut-outs.

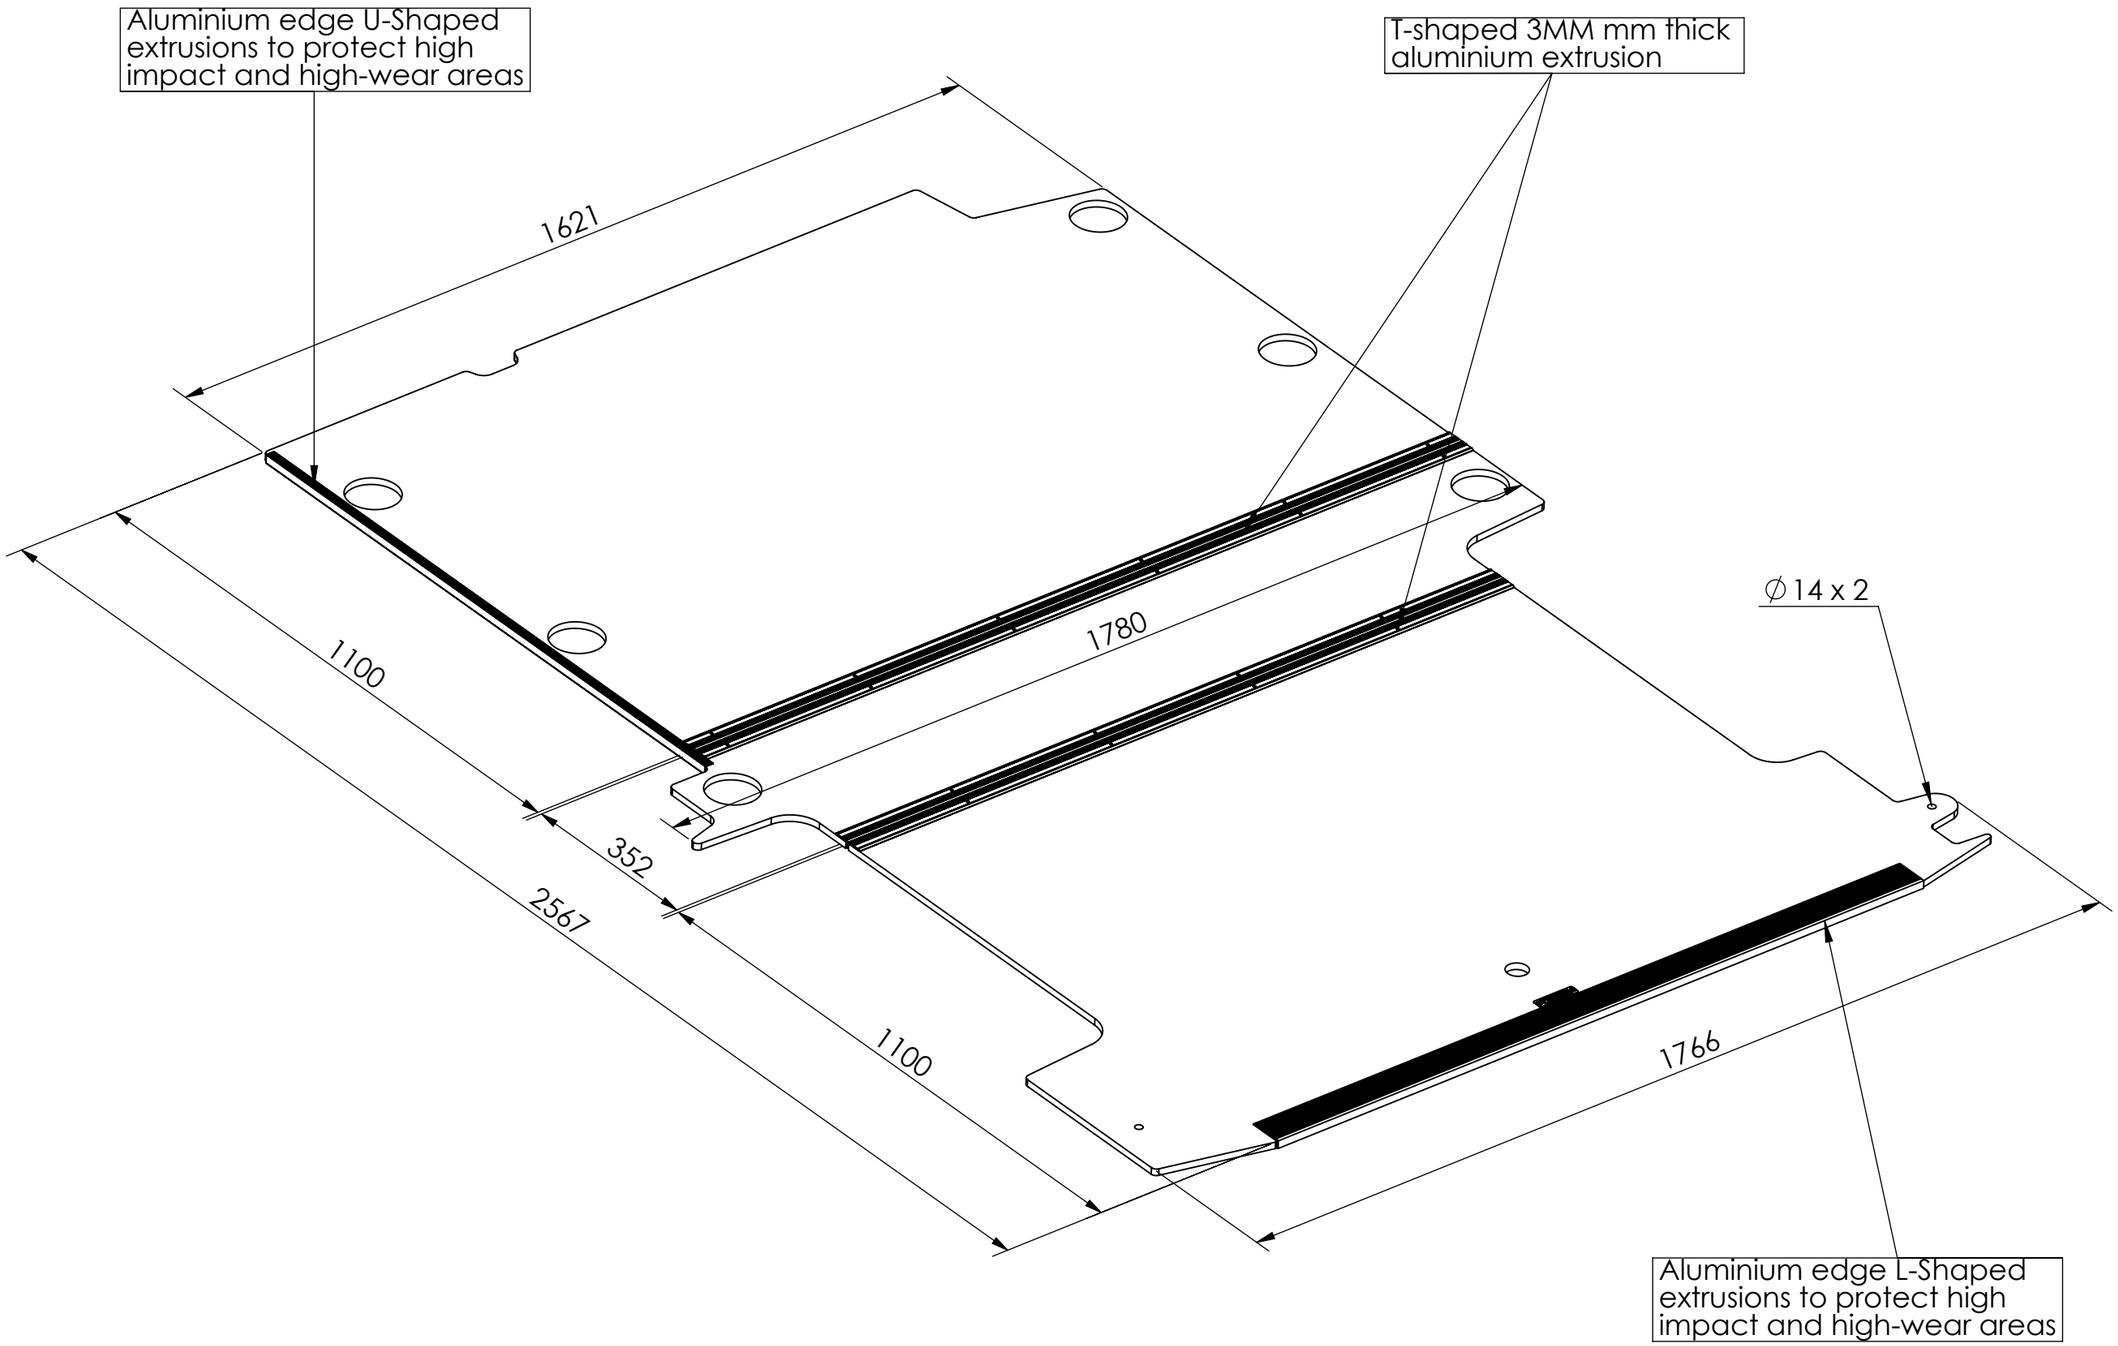

ESTIMATED WEIGHT :
35.98 KG

ITEM CODE:
FAR-SV-L1H1-5P-VF

DRAWN BY: MI

CHECKED BY: AS

SCALE:
NTS

by ARMOR

MAIL : sales@vanlining.com.au
WEB : www.vanlining.com.au